



固態繼電器 SOLID STATE RELAY

KS2002A KS4002A

KS20 Series (DC-AC)

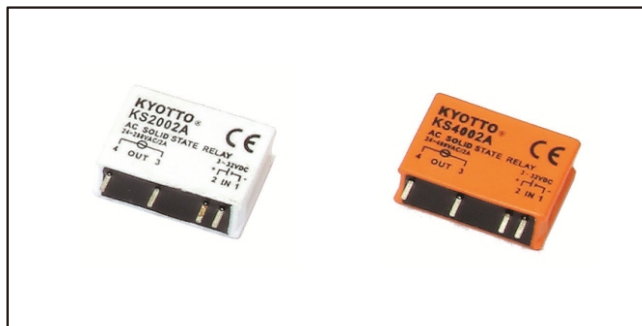

型號索引說明 Model No. Descriptions:

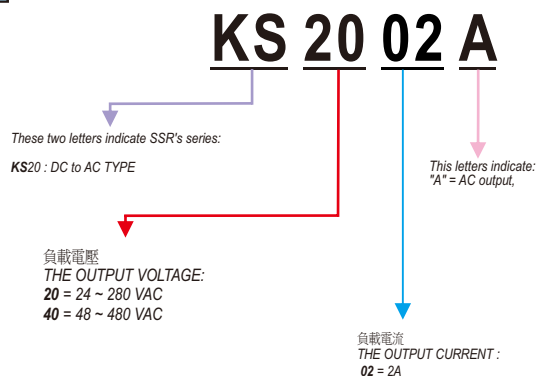

產品摘錄 PRODUCT SELECTON

輸出規格 OUTPUT SPECIFICATIONS

品名	Description	KS2002A	KS4002A
負載電壓範圍	Operating Voltage [VDC]	24-280VAC	48-480VAC
最大負載電流	Maximum Load Current [Adc]	2	2
破壞電壓	Maximum Transient Overvoltage [Vpk]	600	1200
洩露電流	Maximum Off-State Leakage Current @Rated Voltage [mA]	3mA	3mA
最大瞬間承受電流	Maximum Surge Current [Adc] (10ms)	20A	30A
動作壓降	Maximum On-State Voltage Drop @ Rated Current [VDCrms]	1.5	1.5

輸入規格 INPUT SPECIFICATIONS

品名	Description	KS2002A	KS4002A
控制電壓範圍	Control Voltage Range	3-32VDC	3-32VDC
最小導通電壓	Must Turn-on Voltage	3.0	3.0
最大關斷電壓	Must Turn-off Voltage	1.0	1.0
輸入電流	Typical Input Current	15mA	15mA
最大動作時間	Maximum Turn-on Time [mSec]	2mS	2mS
最大關斷時間	Maximum Turn-off Time [mSec]	Less 1/2AC cycle	Less 1/2AC cycle


一般規格 GENERAL SPECIFICATIONS

品名	Description	KS2002A	KS4002A
輸入/輸出至外殼絕緣電壓	Dielectric Strength , Input-Output Base (50/60Hz)	-	-
輸入/輸出絕緣電壓	Dielectric Strength , Input-Output (50/60Hz)	2500	2500
絕緣電阻	Minimum Insulation Resistance	10 ⁹ ohm	10 ⁹ ohm
輸入-輸出容抗	Maximum Capacitance , Input-Output	Less 15pf	Less 15pf
工作溫度範圍	Ambient Operating Temperature Range	-20°C~+80°C	-20°C~+80°C
儲存溫度範圍	Ambient Storage Temperature Range	-40°C~+100°C	-40°C~+100°C
觸發方式	Switching Type	Zero Cross	Zero Cross
重量	Weight (g)	6g	6g

GENERAL NOTES


- (1) All parameters at 25°C unless otherwise specified
- (2) Dielectric strength and insulation resistance are measured between input and output
- (3) Heat sinking require ,for derating curves see next page.

等效電路圖 EQUIVALENT CIRCUIT

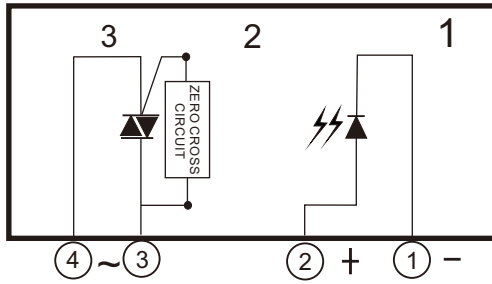

- 1.INPUT CIRCUIT
- 2.ZERO-CROSS CIRCUIT
- 3.OUTPUT CIRCUIT

外觀尺寸圖 MECHANICAL DIMENSIONS (Unit:mm)

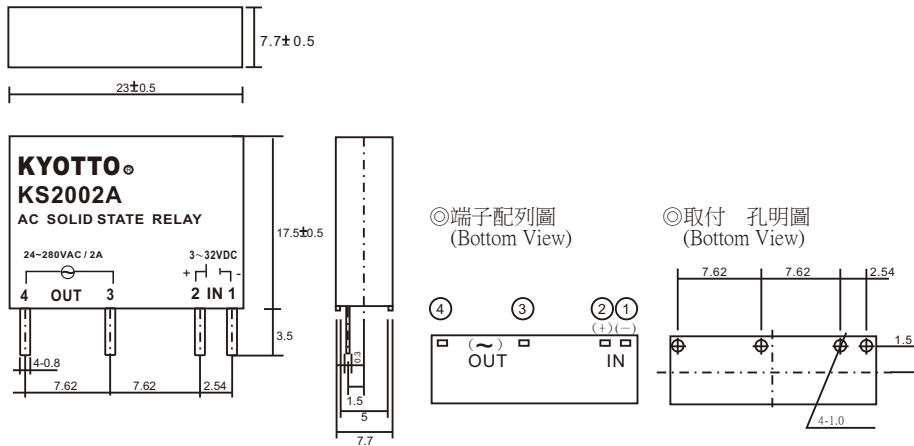

特性曲線圖 CHARACTERISTIC CURVES

